



TEK Kinetic Air Relief Valve


Double Flange Ductile Iron Double Orifice
Kinetic Air Relief Valve PN16



TEK Kinetic Air Relief Valve

Ductile Iron Double Orifice Kinetic Air Relief Valve PN16

- Diameter Range : DN50-DN200
- Flange Drilling : BS 4504 PN16, other standard upon request.
- Coating : High Solid Epoxy Coating as standard, other coating upon
- Features : Removable cover casing for easy inspection and maintenance of orifice float (ball).
- Specification : JKR 20200-0097-01 / AWWA C512:2004

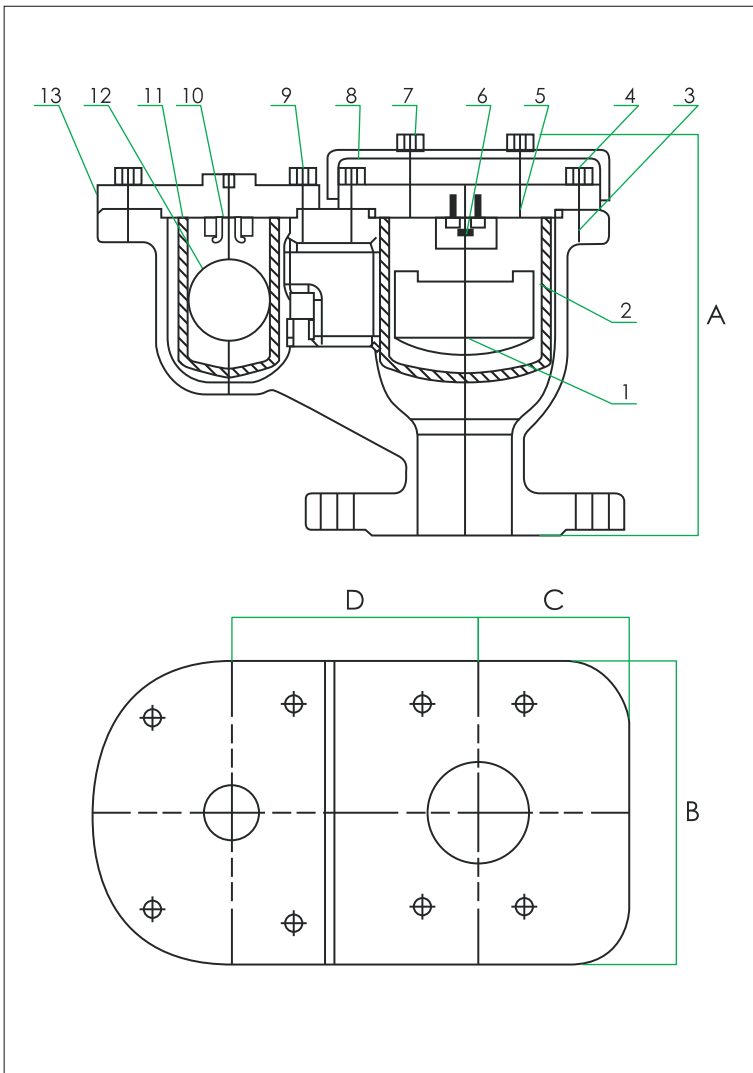

DIMENSIONS

DN	A	B	C	D
50	275	170	90	220
80	275	190	110	235
100	310	230	110	260
150	400	280	135	295
200	540	450	165	375

SPECIFICATIONS

No	Part	Material Description
1	Large Orifice Float	ABS
2	Ball Guide	ABS
3	Body	Ductile Iron, BS EN 1563 Grade 500/7
4	Bolt	Stainless Steel
5	Large Orifice Plate	Ductile Iron, BS EN 1563 Grade 500/7
6	Air Release Nipple	EPDM
7	Bolt	Stainless Steel
8	Large Orifice Cover	Ductile Iron, BS EN 1563 Grade 500/7
9	Bolt	Stainless Steel
10	Air Release Nipple	EPDM
11	Ball Guide	ABS
12	Small Orifice Float	ABS
13	Small Orifice Plate	Ductile Iron, BS EN 1563 Grade 500/7

NOTE:

1. UNIT OF MEASUREMENT:MM

2. THE DESIGNS, MATERIALS AND SPECIFICATIONS SHOWN ARE SUBJECT TO CHANGE WITHOUT NOTICE DUE TO OUR CONTINUING PROGRAMME OF PRODUCT DEVELOPMENT.

3. SIZES ABOVE 200MM ARE AVAILABLE UPON REQUEST.